

Super High Res. Color Box Camera

S-MTC8292DN-M, S-MTC8392DN-M



S-MTC8292DN-M

Features

- 1/2" Super Hi-Res. Color Camera
- SONY HQ1/ 540TVL/ 0.05Lux@F1.0
- Mechanical Focus Adjustment
- AES/AGC/BLC/Digital Day&Night (ON/OFF)
- Video/DC IRIS Control
- Line Lock

S-MTC8292DN-M



S-MTC8392DN-M

S-MTC8392DN-M

Features

- 1/3" Super Hi-Res. Color Camera
- SONY HQ1/ 540TVL/ 0.15Lux@F1.0
- Mechanical Focus Adjustment
- AES/AGC/BLC/Digital Day&Night (ON/OFF)
- Video/DC IRIS Control
- Line Lock


Specifications

| | S-MTC8292DN-M | | S-MTC8392DN-M | |
|---------------------------------|--|---------------|-------------------------|---------------|
| TV System | PAL | NTSC | PAL | NTSC |
| Image Sensor | 1/2" SONY Exview™HAD CCD | | 1/3" SONY SUPER HAD CCD | |
| Number of Total Pixels | 795(H)x596(V) | 811(H)x508(V) | 795(H)x596(V) | 811(H)x508(V) |
| Resolution ; DSP | 540TVL ; SONY HQ1 | | | |
| Minimum Illumination | 0.05Lux@F1.0 | | 0.15Lux@F1.0 | |
| Video Output ; Connector | 1.0Vp-p Composite, 75 Ω ; BNC | | | |
| Signal to Noise Ratio | More than 50dB (SUPER AGC off) | | | |
| Gamma Correction | 0.45 | | | |
| Synchronizing System | INTERNAL / LINE LOCK (AC Version Only) | | | |
| Automatic Electronic Shutter | ON:1/50(60)sec.~1/100,000sec. / OFF:1/50(60)sec. | | | |
| Automatic Gain Control | AGC / SUPER AGC | | | |
| Automatic White Balance | Automatic | | | |
| Back Light Compensation | ON / OFF | | | |
| Flickerless | NA | | | |
| Digital Day&Night Mode | COLOR / D&N (B/W Mode<1Lux, Color Mode>5Lux) | | | |
| Mirror Mode | NA | | | |
| Automatic IRIS ; Connector | VIDEO / DC ; D4 IRIS Jack | | | |
| Adjustment VR | DC Level, L.L V-phase | | | |
| Lens Mount | C / CS mount (With Adaptor) | | | |
| Lens, Angle of View(H) | Lens Option: Please See the Page of Lens Series | | | |
| Power Supply ; Consumption | 12Vdc/24Vac:3.0W(250mA) ; 90~260Vac:4.5W | | | |
| Operation ; Storage Temp. | -10°C~50 °C ; -20°C~60 °C | | | |
| Operation ; Storage Humidity | Maximum:RH80% ; RH90% | | | |
| Dimensions | 60(W)x49(H)x99(D)mm | | | |
| Net Weight | 12Vdc/24Vac:250g ; 90~260Vac:300g | | | |
| Accessories Series Option(Page) | Lens(G-5~7) ; Bracket:MTB-101, MTB-102(G-3) ; Housing(G-4) | | | |

specifications and appearance are subject to change without notice

Dimensions

UNT:mm Tol:±0.5

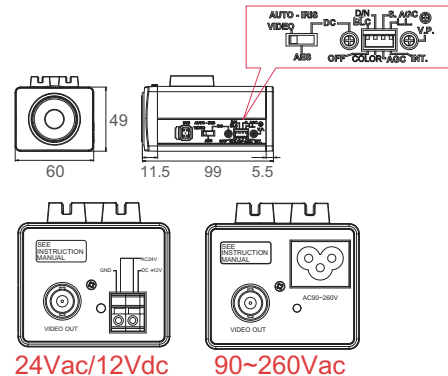

24Vac/12Vdc

90~260Vac